FM503

HF Motion Detector Module

High Frequency (Microwave) Detectors equipped with 5.8GHz sensor module are ideal for closed spaces and concealed installation. HF modules can even be installed inside luminaries or suspended ceiling, totally free from aesthetic concern.

Specifications

Model Name	**FM503AA5**	
Product Name	**ON/OFF Control, Sensor Detached** HF Motion Detector Module	
Sensor Technology	5.8GHz High Frequency	
Rated Voltage	100-240VAC, 50/60Hz	
Operating Temperature	0°C ~ 70°C	
Rated Load	120V: Incandescent: 1000W High Voltage Halogen: 500W Low Voltage Halogen: 500VA/400W Fluorescent: 400VA/300W Energy Saving or LED Lamp: 300VA/250W	230V: Incandescent: 2000W High Voltage Halogen: 1000W Low Voltage Halogen: 1000VA/900W Fluorescent: 900VA/100uF Energy Saving or LED Lamp: 600VA/400W
Rated Protection	IP20	
Detection Range	Ceiling Mount: Ø12m at 2.5m height, 20°C Wall Mount: front 12m at 1.1m height, 20°C	
Detection Angle	Ceiling Mount: 360° / Wall Mount: 180°	
Time Setting	5 sec - 30 min	
Lux Setting	2 - 50 lux	
Sense Setting	25% - 100%	
Operation Mode / Function	Auto / Test	

Specification is subject to change without notice.

LE_FM503AA5_HF_Module_0521_V1

Dimension

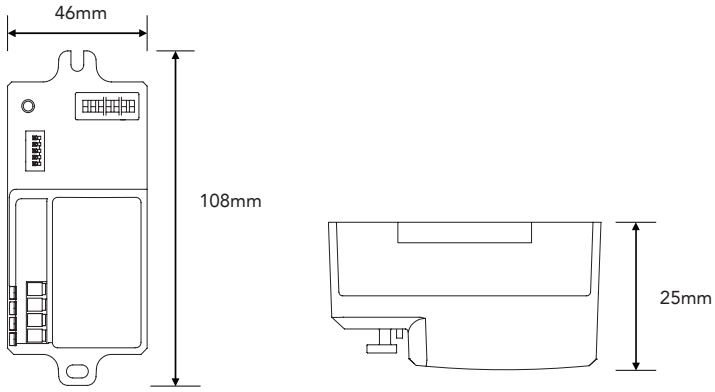

EmCom Technology Inc.
7F, No. 219, Sec. 3, Nanjing E. Rd., Taipei 10488, Taiwan
Tel: +886-2-27177766 | Fax: +886-2-27171800 | sales@emcom.com.tw
www.emcom.com.tw